

**NEW!**



- ISO 4414    EN 983
- ISO 6150-C-10
- AFNOR: C-10 NF E 49-053



EN

### Features

- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

DE

### Auf einen Blick

- Voller Durchgang, geringer Druckverlust
- Einfache Bedienung ohne Kraftaufwand
- Kompakte Bauform

FR

### En bref

- Passage intégral, faible perte de pression
- Maniement simple et sans efforts
- Construction compacte

NL

### In een oogopslag

- Volledige doorlaat, weinig drukverlies
- Eenvoudige bediening zonder krachtsinspanning
- Compact ontwerp

Operating Pressure	Betriebsdruck	Pression de service	Werkdruk
<ul style="list-style-type: none"> <li>• Up to 25 bar, Vacuum till 100 mbar</li> <li>• connection/disconnection to max. 15 bar</li> </ul>	<ul style="list-style-type: none"> <li>• Bis 25 bar, techn. Vakuum bis 100 mbar</li> <li>• ein-/auskuppeln bis max. 15 bar</li> </ul>	<ul style="list-style-type: none"> <li>• Jusqu'à 25 bar, Vide technique jusqu'à 100 mbar</li> <li>• accouplement/désaccouplement jusqu'à 15 bar max</li> </ul>	<ul style="list-style-type: none"> <li>• tot 25 bar, 100 mbar Vacuum</li> <li>• aan- en afkoppelen tot max. 15 bar</li> </ul>

<p>-20° to + 100°C (NBR) -4° to + 212°F</p>	<p>295 00 233</p>	<p>295 00 003</p>
---	-------------------	-------------------

Materials, Seals	Material Code	Optional
	<p>A = Steel, nickel plated (for thread) aluminum (for hose tail)</p> <p>B = Steel, tenifer treated</p> <p>C = Stainless steel</p> <p>E = Nitrile elastomer (NBR)</p> <p>I = Surface hardened steel, nickel plated</p> <p>S = Steel, tenifer treated</p> <p>Z = Zinc diecast, nickel plated, orange rubber coating</p>	<div style="border: 1px solid red; padding: 5px; display: inline-block;"> <p>295 00 385</p> </div> <div style="border: 1px solid red; padding: 5px; display: inline-block;"> <p>295 00 480</p> </div>

Options	Plug Profile K	Compatible with
<div style="display: flex; gap: 10px;"> <div style="border: 1px solid red; padding: 5px; background-color: red; color: white;">FPM</div> <div style="border: 1px solid red; padding: 5px; background-color: red; color: white;">EPDM</div> <div style="border: 1px solid red; padding: 5px; background-color: red; color: white;">Swivel <span style="font-size: 8px; background-color: black; color: white; padding: 2px;">NEW</span></div> <div style="border: 1px solid red; padding: 5px; background-color: red; color: white;">AISI303 <span style="font-size: 8px; background-color: black; color: white; padding: 2px;">NEW</span> <small>Stainless Steel</small></div> </div>	<p>S = Steel, tenifer treated</p>	<p>TST 107.06</p> <p>TST 018</p> <p>TST SV - DN 6</p> <p>Rectus 18</p> <p>Cejn 291</p>







tst®

SC Series K

DN6  
1/4"



**SWING COUPLING SCHWENKKUPPLUNG**

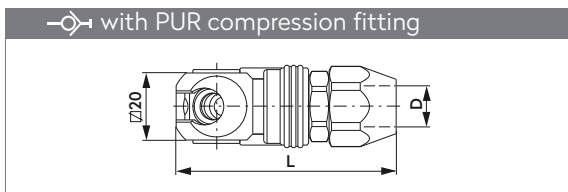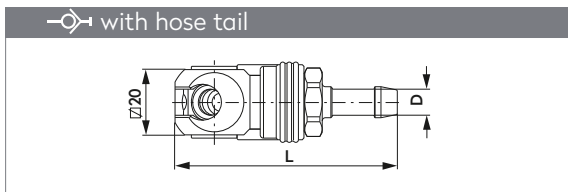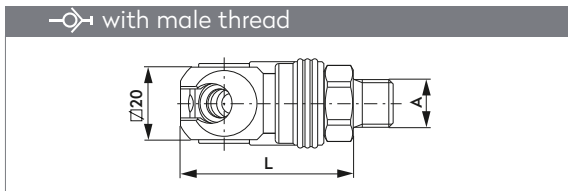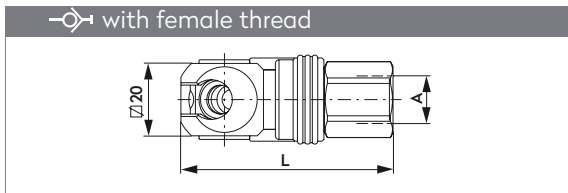




A	Part No.	L	L (swivel)
G1/4	205 00 156	56.1	65.6
G3/8	205 00 157	57.6	67.1
G1/2	205 00 158	61.1	70.6
NPT1/4	205 00 160	56.1	65.6
NPT3/8	205 00 161	58.6	68.1
NPT1/2	205 00 162	64.6	74.1

A	Part No.	L	L (swivel)
G1/4	205 00 163	47.6	56.6
G3/8	205 00 164	47.6	56.6
G1/2	205 00 165	48.6	57.6
NPT1/4	205 00 166	48.8	57.8
NPT3/8	205 00 167	48.8	57.8
NPT1/2	205 00 168	48.6	57.6

D	Part No.	L	L (swivel)
6 mm 1/4"	205 00 169	68.1	77.1
8 mm 5/16"	205 00 170	68.1	77.1
10 mm 3/8"	205 00 171	68.1	77.1

D	Part No.	L
6.5 X 10	205 00 276	62.6
8 X 12	205 00 277	65.6

**PLUG STECKNIPPEL**

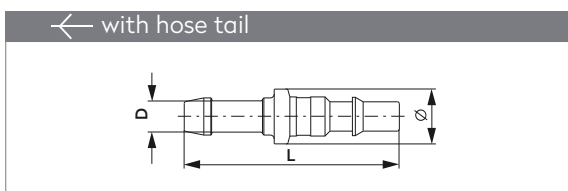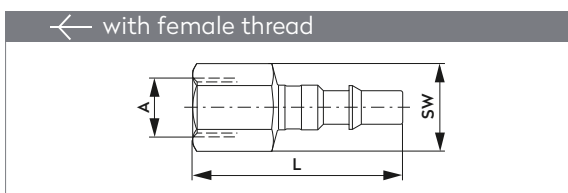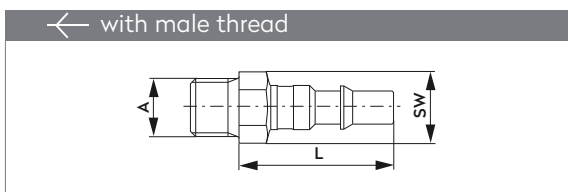

A	Part No.	L	SW
G1/8	255 00 093	38.0	14
G1/4	255 00 091	35.0	14
G3/4	255 00 092	38.0	17
NPT1/4	255 00 112	35.7	14
NPT3/8	255 00 117	38.7	17

A	Part No.	L	SW
G1/8	255 00 100	46.0	14
G1/4	255 00 088	47.0	17
NPT1/4	255 00 119	48.0	17

D	Part No.	L	Ø
6 mm 1/4"	255 00 113	55.0	14
8 mm 5/16"	255 00 114	55.0	14
10 mm 3/8"	255 00 115	55.0	14
13 mm 1/2"	255 00 116	55.0	16