

ISO 4414 EN 983

ISO 6150-C-17

AFNOR: C-17 NF E 49-053



EN

### Features

- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

DE

### Auf einen Blick

- Voller Durchgang, geringer Druckverlust
- Einfache Bedienung ohne Kraftaufwand
- Kompakte Bauform

FR

### En bref




- Passage intégral, faible perte de pression
- Maniement simple et sans efforts
- Construction compacte




NL


### In een oogopslag

- Volledige doorlaat, weinig drukverlies
- Eenvoudige bediening, zonder krachtsinspanning
- Compact ontwerp

Operating Pressure	Betriebsdruck	Pression de service	Werkdruk
<ul style="list-style-type: none"> <li>• Up to 25 bar, Vacuum till 100 mbar</li> <li>• connection/disconnection to max. 15 bar</li> </ul>	<ul style="list-style-type: none"> <li>• Bis 25 bar, techn. Vakuum bis 100 mbar</li> <li>• ein-/auskuppeln bis max. 15 bar</li> </ul>	<ul style="list-style-type: none"> <li>• Jusqu'à 25 bar, Vide technique jusqu'à 100 mbar</li> <li>• accouplement/désaccouplement jusqu'à 15 bar max</li> </ul>	<ul style="list-style-type: none"> <li>• tot 25 bar, 100 mbar Vacuum</li> <li>• aan- en afkoppelen tot max. 15 bar</li> </ul>

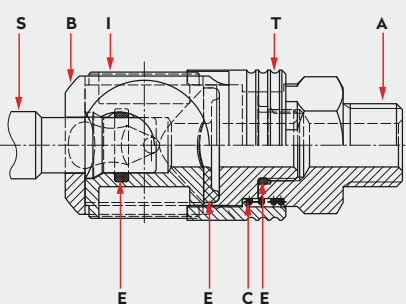 <p>-20° to + 100°C (NBR) -4° to + 212°F</p>	 <p>OM178-01560 05003602</p>	 <p>295 00 094</p>
---	---	---

Materials, Seals	Material Code	Optional
	<p>A = Steel, nickel plated (for thread) aluminum (for hose tail)            B = Steel, tenifer treated            C = Stainless steel            E = Nitrile elastomer (NBR)            I = Surface hardened steel, nickel plated            S = Steel, tenifer treated            Z = Zinc diecast, nickel plated, orange rubber coating</p>	<div style="display: flex; align-items: center;">  <div style="margin-left: 20px;">295 00 531</div> </div> <div style="display: flex; align-items: center; margin-top: 10px;">  <div style="margin-left: 20px;">295 00 482</div> </div>

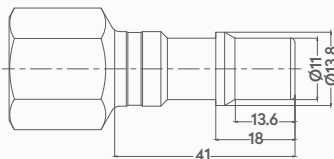Options	Plug Profile G	Compatible with
<div style="display: flex; justify-content: space-around;"> <div style="background-color: red; color: white; padding: 5px;">FPM</div> <div style="background-color: red; color: white; padding: 5px;">EPDM</div> </div>	 <p>S = Steel, tenifer treated</p>	<p>TST 107.11 TST SV - DN 11</p>






tst®

SC Series G

DN11 1/2"



**SWING COUPLING SCHWENKKUPPLUNG**

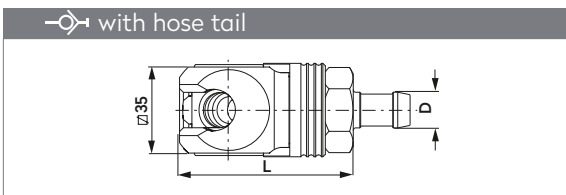
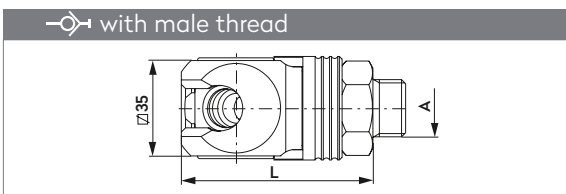
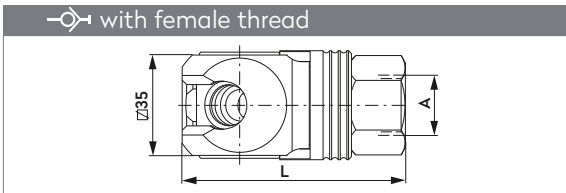


A	Part No.	L
G3/8	205 00 132	73.8
G1/2	205 00 133	77.8
G3/4	205 00 134	80.3
NPT3/8	205 00 138	78.8
NPT1/2	205 00 139	82.3
NPT3/4	205 00 140	83.3

A	Part No.	L
G3/8	205 00 135	70.3
G1/2	205 00 136	70.3
G3/4	205 00 137	70.3
NPT3/8	205 00 141	70.3
NPT1/2	205 00 142	70.3
NPT3/4	205 00 143	70.3

D	Part No.	L
13 mm 1/2"	205 00 737	93.3

**PLUG STECKNIPPEL**

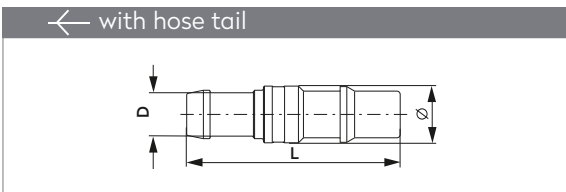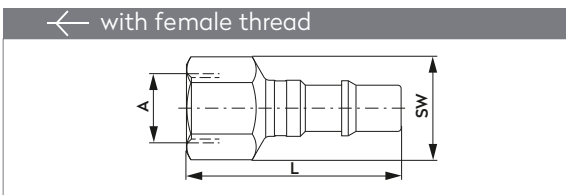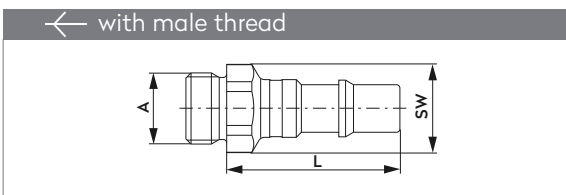

A	Part No.	L	SW
G3/8	255 00 131	51.0	24
G1/2	255 00 132	51.0	24
G3/4	255 00 133	51.0	27
NPT3/8	255 00 137	51.0	24
NPT1/2	255 00 138	51.0	24
NPT3/4	255 00 139	51.0	27

A	Part No.	L	SW
G3/8	255 00 128	65.0	24
G1/2	255 00 129	65.0	24
G3/4	255 00 130	69.0	32
NPT3/8	255 00 134	65.0	24
NPT1/2	255 00 135	67.0	27
NPT3/4	255 00 136	69.0	32

D	Part No.	L	$\varnothing$
10 mm 3/8"	255 00 140	64.0	17
13 mm 1/2"	255 00 141	64.0	17
16 mm 5/8"	255 00 142	66.0	22