

ISO 4414	EN 983
US: MIL-C-4109	
ISO 6150-B-17	
AFNOR: C-17 NF E 49-053	



- EN Features**
- Full flow, negligible loss of pressure
 - Simple operation, no force required
 - Easy grip release ring
 - Corrosion and ozone proof

- DE Auf einen Blick**
- Voller Durchgang, geringer Druckverlust
 - Einfache Bedienung ohne Kraftaufwand
 - Griffiger Auslösering
 - Korrosions und ozonbeständig

- FR En bref**
- Passage intégral, faible perte de pression
 - Maniement simple et sans efforts
 - Bague de déclenchement
 - Résistant à la corrosion et à l'ozone

- NL In een oogopslag**
- Volledige doorlaat, weinig drukverlies
 - Eenvoudige bediening, zonder krachtsinspanning
 - Ontkoppeling
 - Bestand tegen corrosie en ozon

Operating Pressure	Betriebsdruck	Pression de service	Werkdruk
<ul style="list-style-type: none"> • Up to 25 bar, Vacuum till 100 mbar • connection/disconnection to max. 15 bar 	<ul style="list-style-type: none"> • Bis 25 bar, techn. Vakuum bis 100 mbar • ein-/auskuppeln bis max. 15 bar 	<ul style="list-style-type: none"> • Jusqu'à 25 bar, Vide technique jusqu'à 100 mbar • accouplement/désaccouplement jusqu'à 15 bar max 	<ul style="list-style-type: none"> • tot 25 bar, 100 mbar Vacuum • aan- en afkoppelen tot max. 15 bar

Key Icon


-15° to + 200°C (FPM)
+5° to + 392°F

O-ring Icon

5004875
5004725

Release Ring Icon

295 00 095

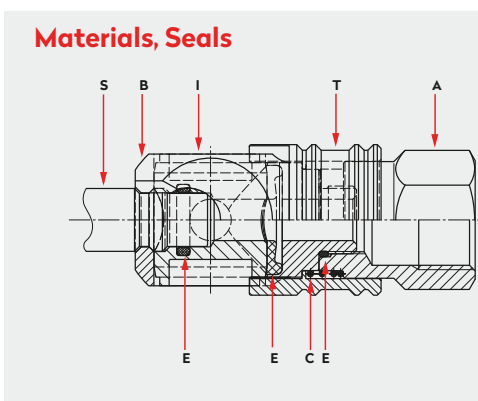

Material Code

A = Brass, nickel plated
 B = Brass, nickel plated
 C = Stainless steel, 1.4310
 E = FPM
 I = Aluminum
 S = Stainless steel, 1.4305
 T = Brass, nickel plated


Optional

Release Ring Icon 295 00 531

Release Ring Icon 295 00 482

Options

NBR **EPDM**


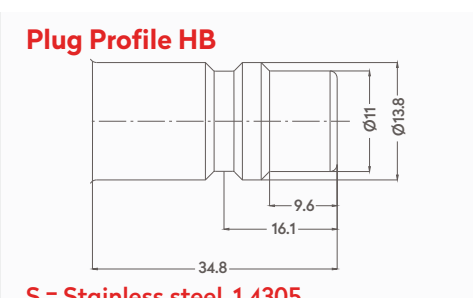


Compatible with

TST	037
Industrial Interchange	1/2"
AMFLO	C10
Hansen	520
Foster	5205
Parker	17






SWING COUPLING SCHWENKKUPPLUNG

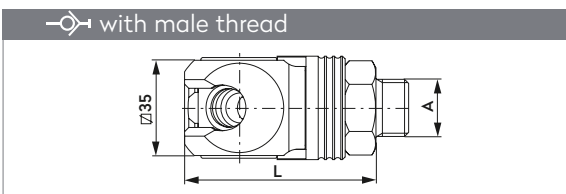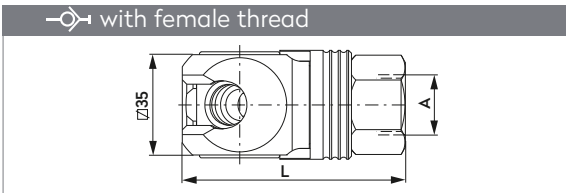

A	Part No.	L
G1/2	205 00 685	83.3
G3/4	205 00 684	90.3
NPT1/2	205 00 687	83.3
NPT3/4	205 00 686	90.3

A	Part No.	L
G1/2	205 00 743	80.3
G3/4	205 00 744	80.3
NPT1/2	205 00 745	83.3
NPT3/4	205 00 746	90.3

PLUG STECKNIPPEL

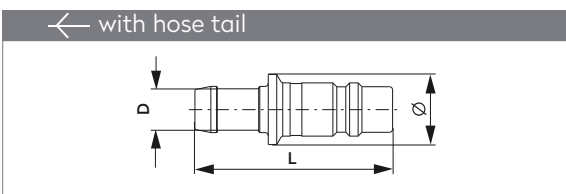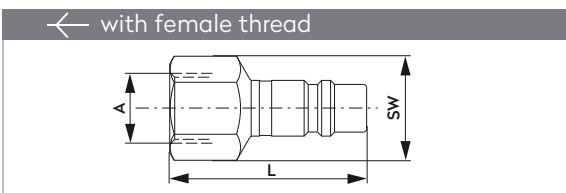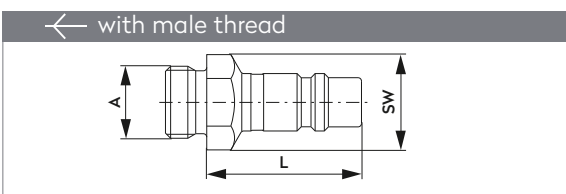

A	Part No.	L	SW
G3/8	355 00 250	45.0	19
G1/2	355 00 075	45.0	24
G3/4	355 00 327	45.0	27
NPT1/2	355 00 328	44.0	24
NPT3/4	355 00 253	45.0	27

A	Part No.	L	SW
G3/8	355 00 076	59.0	19
G1/2	355 00 077	59.0	27
G3/4	355 00 278	63.0	32
NPT1/2	355 00 255	61.0	27
NPT3/4	355 00 256	63.0	32

D	Part No.	L	\varnothing
10 mm 3/8"	355 00 079	64.0	22
13 mm 1/2"	355 00 080	62.0	22
16 mm 5/8"	355 00 081	64.0	22