





PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 160

DN 16



Materials



Material Code

A = Brass Chrome Plated

B = Brass Chrome Plated

S = Brass Chrome Plated



0 - 25 bar
(0-362 PSI)



-20° to + 100°C (NBR)
-4° to + 212°F

Shut Off Type




OM 300 - 02000
CON - 2450 - 1800 - 20

FULL FLOW

DN

16 mm

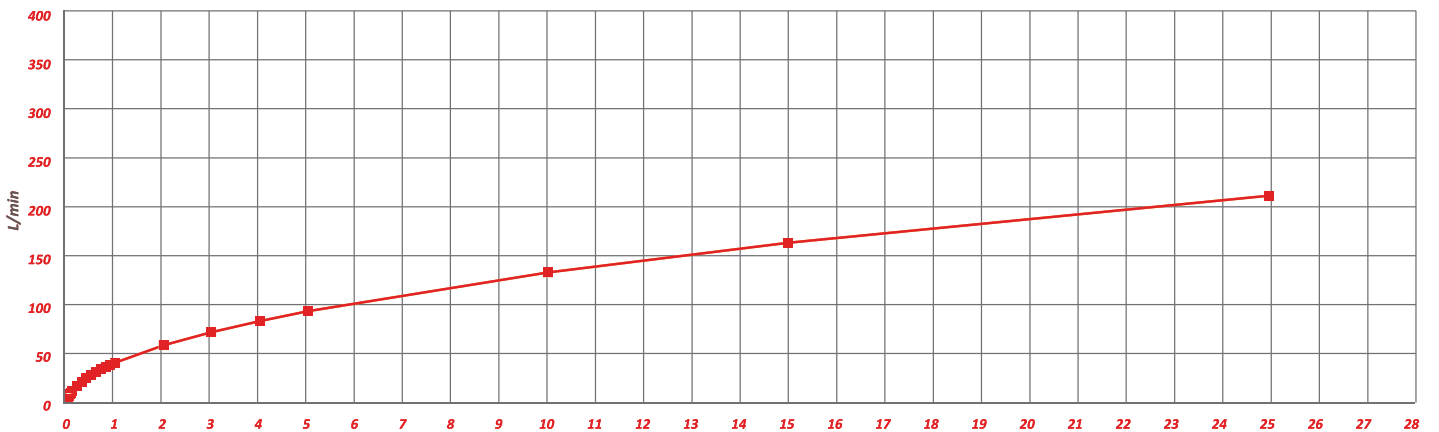

Options




AISI303
Stainless Steel

AISI316
Stainless Steel

FPM

Plug Profile Serie 160



Compatible with

DYROS 2000
NITO 3/4" (5360)



UNVALVED QUICK COUPLINGS SCHNELLKUPPLUNGEN OHNE VENTIL

← with female thread

Connection	Part No.	ØD	L
BSP 3/4"	160 DGF 26	35	31,5

← with standard hose tail

Connection	Part No.	ØD	L
Ø 19	160 HGF 19	35	54,8

PLUGS STECKNIPPEL

← with male thread

Connection	Part No.	L	SW
BSP 3/4"	160 EU 26	35	27

← with male thread HEX

Connection	Part No.	ØD	L
BSP 3/4"	160 EU 26 - 01	27	35

← with female thread

Connection	Part No.	ØD	L
BSP 3/4"	160 DU 26	30	35,5

← with standard hose tail

Connection	Part No.	ØD	L
Ø 13	160 HU 13	21,8	47
Ø 19	160 HU 19	21,8	50

ADAPTER ADAPTER

← with plastic hose tail

Connection	Part No.	ØD	L
BSP 3/4" - Ø19	160 GU 19	BSP 3/4"	35,3