



Filterelement gesintert, einstellbar

Betriebsdruck: 0 - 20 bar
 Betriebstemperatur: -10 °C bis 600 °C

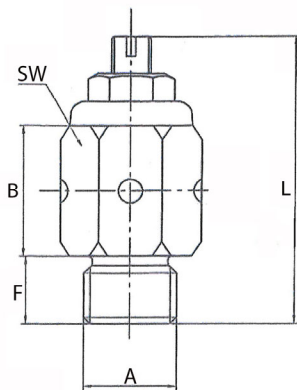

SD38ESEB

Schalldämpfer, Edelstahl gesintert, Edelstahl-Gehäuse, einstellbar

Artikel Nr.	Typen Nr.	Gewinde A	F mm	B mm	SW mm	L mm	L max. mm
156524	SD18ESEB	G 1/8	6,0	14,0	13	29,0	39,0
156525	SD14ESEB	G 1/4	8,5	16,5	14	35,5	48,0
156526	SD38ESEB	G 3/8	10,0	17,5	17	38,0	50,0
156527	SD12ESEB	G 1/2	10,5	19,0	22	42,5	53,0
156528	SD34ESEB	G 3/4	13,5	24,0	27	49,5	65,5
156529	SD1ESEB	G 1	15,5	25,0	34	51,5	70,0