


Betriebstemperatur
Gehäuse
Ventilteller
Betriebsdruck max.
Gewindenorm


-10 °C bis 80 °C
Rotguss
Messing
16 bar
G-Gewinde nach DIN EN ISO 228-1

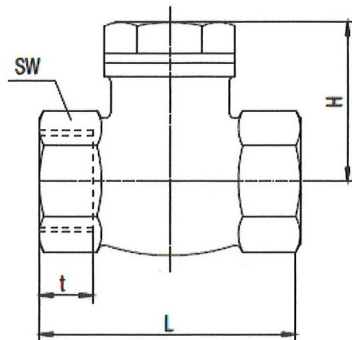

RK12RG

Rückschlagklappe metallisch dichtend, Rotguss

| Artikel Nr. | Typen Nr. | Gewinde | DN | SW mm | L mm | H mm | t mm |
|-------------|-----------|---------|----|----------|---------|---------|---------|
| 158073 | RK12RG | G 1/2 | 15 | 27 | 60,0 | 40,0 | 12,0 |
| 158074 | RK34RG | G 3/4 | 20 | 34 | 70,0 | 49,0 | 13,0 |
| 158075 | RK1RG | G 1 | 25 | 41 | 80,0 | 56,0 | 15,0 |
| 158076 | RK114RG | G 1 1/4 | 32 | 51 | 95,0 | 60,0 | 16,0 |
| 158077 | RK112RG | G 1 1/2 | 40 | 55 | 105,0 | 70,0 | 18,0 |
| 158078 | RK2RG | G 2 | 50 | 70 | 130,0 | 80,0 | 20,0 |
| 158079 | RK212RG | G 2 1/2 | 65 | 90 | 160,0 | 105,0 | 20,0 |

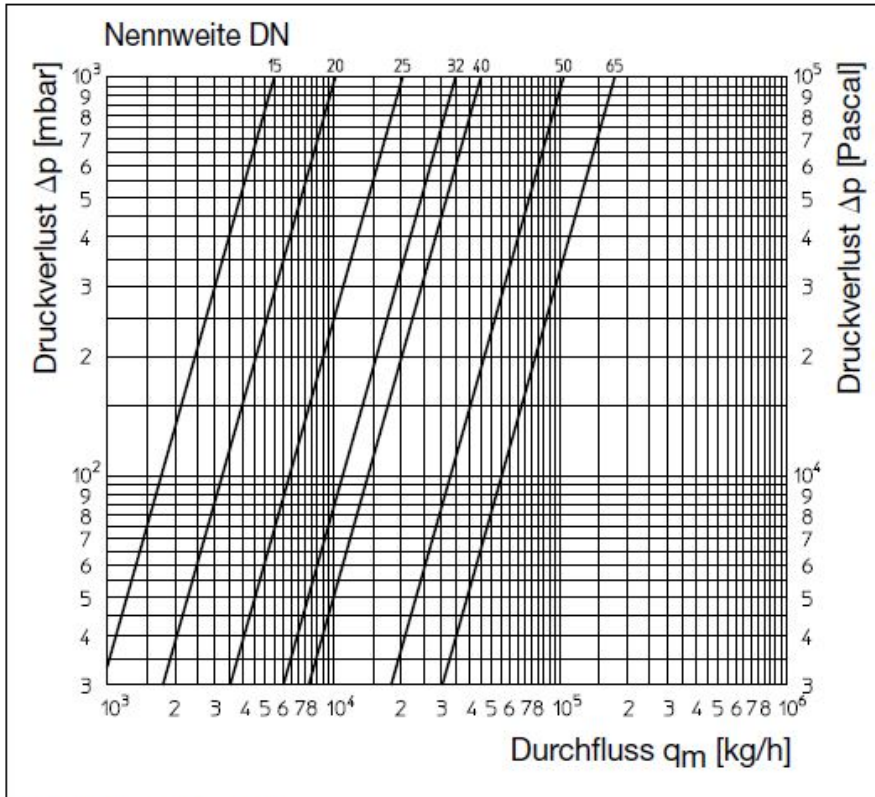

Durchflussdiagramm